



COMPRESSION LEASING SERVICES

SALES • RENTALS • LEASING • SERVICE • PARTS

PREMIUM RENTAL EQUIPMENT



COMPRESSORS EVERYWHERE

PROVIDING THE WORLD WITH HIGH PRESSURE BOOSTERS & COMPRESSORS

PREMIUM RENTAL EQUIPMENT

BOOSTERS, COMPRESSORS & MIST PUMPS

GARDNER DENVER RLC

SINGLE-STAGE BOOSTER



RLC-SERIES

Length - 17'
 Height - 8'
 Width - 8'6"
 Weight - 17,600 lbs.
 Fuel Capacity - 30 gal
 - Engine - Cummins
 QSL-9 Powered
 - Spark arresting muffler


- BOOSTER CAN COMPRESS AIR AND NATURAL GAS
- FUEL QUICK CONNECTS FOR LARGER TANK AND FUEL SUPPLY
- HEAVY DUTY SKID WITH TAIL ROLL
- ASME CODE VESSELS AND COOLER SECTION
- UNIT HAS AIR/GAS PRE-COOLER AND AFTERCOOLER (UNIT CAN BE SUPPLIED BY NON-AFTERCOOLED SCREWS)

SINGLE STAGE CYLINDER:

-5.5" Bore X 9" Stroke 1500 PSI Double Acting
 Single-Stage limit is 1000 PSI at 1700 CFM (from 325 PSI suction)
 (Discharge Volume and Pressures vary depending on RPM, suction pressure, & volume supplied to booster)

JOY/ GARDNER DENVER JY500

TWO-STAGE BOOSTER (WITH SINGLE STAGE ABILITY)

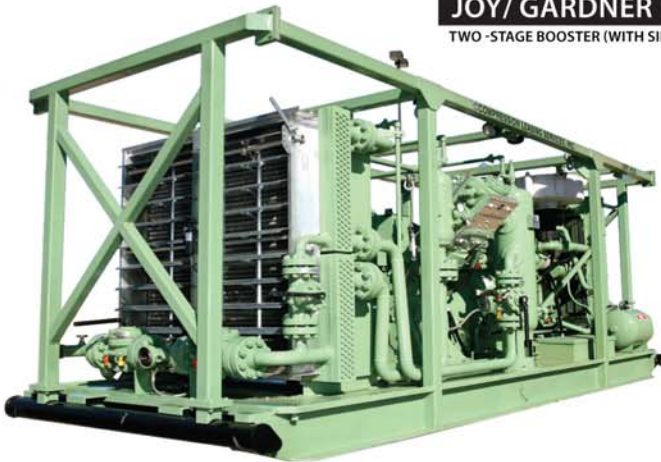

WB-12

Length - 22'6"
 Height - 8'6"
 Width - 8'3" (at cylinders)
 7'10" (at skid base)
 Weight - 34,600 lbs.
 Fuel Capacity - 30 gal
 - Engine - Caterpillar or
 Cummins Powered
 - Spark arresting muffler

- BOOSTER CAN COMPRESS AIR AND NATURAL GAS
- SEAL WELDED ENVIRONMENTAL SKID
- FUEL QUICK CONNECTS FOR LARGER TANK AND FUEL SUPPLY
- HEAVY DUTY SKID WITH TAIL ROLL AND CRANE LIFTING POINTS
- ASME CODE VESSELS AND COOLER SECTION
- UNIT HAS AIR/GAS INTERCOOLER AND AFTERCOOLER (UNIT MUST BE SUPPLIED AIR FROM AFTERCOOLED SCREWS OR HAVE SUCTION TEMP BELOW 140F)
- DESIGNED FOR ON AND OFFSHORE USE

1ST STAGE CYLINDER:

- 6" Bore X 7" Stroke 1700 PSI Double Acting
 - Single-Stage limit is 1000 PSI at 4200 CFM (from 325 PSI suction)
 (Discharge Volume and Pressures vary depending on RPM, suction pressure, & volume supplied to booster)

2ND STAGE CYLINDER:

- 3-3/4" Bore X 7" Stroke 3200 PSI Double Acting
 - Two-Stage Limit is 2600 PSI at 3100 CFM (from 325 PSI suction)
 (Discharge Volume and Pressures vary depending on RPM, suction pressure, & volume supplied to booster)

ARIEL JGA-2

TWO-STAGE BOOSTER (WITH SINGLE STAGE ABILITY)



JGA-2

Length - 19'3"
 Height - 8'
 Width - 7'10"
 Weight - 22,000 lbs.
 Fuel Capacity - 140 gal
 - Engine - Caterpillar
 C9 Acert Powered
 - Spark arresting muffler

- BOOSTER CAN COMPRESS AIR AND NATURAL GAS
- SEAL WELDED ENVIRONMENTAL SKID
- FUEL QUICK CONNECTS FOR LARGER TANK AND FUEL SUPPLY
- HEAVY DUTY SKID WITH TAIL ROLL AND CRANE LIFTING POINTS
- ASME CODE VESSELS AND COOLER SECTION
- UNIT HAS AIR / GAS PRE-COOLER / INTERCOOLER AND AFTERCOOLER (UNIT CAN BE SUPPLIED BY NON-AFTERCOOLED SCREWS)
- DESIGNED FOR ON AND OFFSHORE USE

1ST STAGE CYLINDER:

- 4.75" Bore X 3.00" Stroke 865 Rated PSI Double Acting
 - Single-Stage limit is 900 PSI at 2200 CFM (from 325 PSI suction)
 (Discharge Volume and Pressures vary depending on RPM, suction pressure, & volume supplied to booster)

2ND STAGE CYLINDER:

- 3.00" Bore X 3.00" Stroke 2550 Rated PSI Double Acting
 - Two-Stage Limit is 1750 PSI at 1800 CFM (from 325 PSI suction)



VISIT US ONLINE

WWW.COMPRESSIONLEASING.COM

PREMIUM RENTAL EQUIPMENT BOOSTERS, COMPRESSORS & MIST PUMPS

Quincy-Superior-National

FULLY INTEGRATED TRAILER AIR PACKAGE/FOAM AND WELL CLEAN-OUT UNIT



Trailer

Length - 53'
Height - 13'6"
Width - 8'6"
Weight - 76,600 lbs.

Fuel Capacity - 530 gal
- DOT APPROVED
- BAFFLED
- DOUBLE WALL SAFETY FUEL CELL

Rotary Screw Compressor:

- CUMMINS POWERED QSK-19
- SPARK ARRESTING MUFFLER
- QUINCY SINGLE STAGE ROTARY SCREW 2100 CFM AT 210 PSI (WITH CAPACITY CONTROL SYSTEM)

Booster Compressor:

- CUMMINS QSK-15 POWERED
- SPARK ARRESTING MUFFLER

Superior CFA34 Three-Stage Compressor

1st Stage Cylinders:

- TWO 4.75" BORE X 3.00" STROKE 1155 RATED PSI DOUBLE ACTING CYLINDERS

2nd Stage Cylinder:

- ONE 4.125" BORE X 3.00" STROKE 1350 RATED PSI DOUBLE ACTING

3rd Stage Cylinder:

- ONE 3.00" BORE X 3.00" STROKE 2500 RATED PSI DOUBLE ACTING

- MAX VOLUME 2100 CFM
- MAX PRESSURE 2300 PSI

- SCREW AND BOOSTER UNITS ENGINES HAVE WEBASTO BLOCK HEATERS TO EASE COLD WEATHER STARTING

*PRESSURE AND VOLUME CAPACITY IS BASED UPON ENGINE RPM OF ALL UNITS

Triplex Plunger Pump:

- CUMMINS QSB-3.3 POWERED
- NATIONAL 80T-3M (TRIPLEX PLUNGER PUMP WITH GEAR REDUCTION)
- SPARK ARRESTING MUFFLER
- 4-SPEED TRANSMISSION FOR ADDITIONAL FLOW CONTROL RATES
- 1.75" PLUNGER SIZE (PLUNGERS CAN BE CHANGED TO ACCOMMODATE DIFFERENT FLOWS AND PRESSURES)
- VOLUME 46.8 GALLON PER MINUTE AT 2663 PSI MAX PRESSURE
- UNIT HAS CHEMICAL/SOAP INJECTION PUMP
- TWIN 800 GALLON TANKS WITH MIXING BARS
- DISCHARGE LINE COMPLETE WITH ASME FOAM GENERATOR VESSEL
- CHOKE VALVE FOR VOLUME REGULATION WITH RECYCLE BACK TO TANKS
- NU-FLOW FLOW METER WITH LCD DISPLAY
- UNIT HAS FULL ENVIRONMENTAL CONTAINMENT

NATIONAL TRIPLEX PUMPS

MIST PUMP J80-3TM



J80-3TM

Length - 23'
Height - 5'
Width - 7'2"
Weight - 14,000 lbs.
Fuel Capacity - 30 gal

- Engine - Caterpillar or Cummins Powered
- Spark arresting muffler

- 4-SPEED TRANSMISSION FOR ADDITIONAL FLOW CONTROL RATES
- 1.75" PLUNGER SIZE (PLUNGERS CAN BE CHANGED TO ACCOMMODATE DIFFERENT FLOWS AND PRESSURES)
- VOLUME 46.8 GALLON PER MINUTE AT 2663 PSI MAX PRESSURE WITH STANDARD PLUNGER SIZE
- UNIT HAS CHEMICAL/SOAP INJECTION PUMP INLET CONNECTIONS
- TWIN 1000 GALLON TANKS WITH MIXING BARS
- SEAL WELDED ENVIRONMENTAL SKID
- CHOKE VALVE FOR VOLUME REGULATION WITH RECYCLE BACK TO TANKS
- FUEL QUICK CONNECTS FOR LARGER TANK AND FUEL SUPPLY
- HEAVY DUTY SKID WITH TAIL ROLL ON BOTH ENDS
- LOCKABLE TOOLBOX MOUNTED TO SKID

*PRESSURE AND VOLUME CAPACITY IS BASED UPON ENGINE RPM AND CHOKE VALVE SETTING

SULLAIR

TWO STAGE ROTARY SCREW COMPRESSOR



1350 / 500

Length - 19'6"
Height - 8'7"
Width - 7'2"
Weight - 27,280 lbs.
Fuel Capacity - 66 gal

- Engine - Caterpillar Powered
- 1350 CFM to 500PSI

- LOW SETTING AT 175 PSI / MEDIUM AT 350 PSI / HIGH AT 500 PSI
- SEAL WELDED ENVIRONMENTAL SKID
- FUEL QUICK CONNECTS FOR LARGER TANK AND FUEL SUPPLY
- FULL CONTROL PANEL
- PROTECTIVE ENGINE AND COMPRESSOR SHUTDOWNS
- AFTERCOOLED WITH ASME CODE MOISTURE SEPARATION VESSEL
- CODE WELDED ALL STEEL PIPING (NO RUBBER HOSE ON OIL AND AIR PROCESS PIPING)
- 0-100% CAPACITY CONTROL
- AUTOMATIC LOADING AND UNLOADING
- HEAVY DUTY SKID WITH TAIL ROLL ON BOTH ENDS AND CRANE LIFTING POINTS
- DESIGNED FOR ON AND OFFSHORE USE

CASPER, WY • 1925 & 1935 N. LOOP • 307.265.3242
GILLETTE, WY • 307.682.2084
DENVER, CO • 303.733.4882

3 LOCATIONS
TO SERVE YOU



PREMIUM RENTAL EQUIPMENT: HIGH PRESSURE BOOSTERS, COMPRESSORS & PUMPS



CLS UNITS EQUIPPED WITH:

- MODERN FUEL EFFICIENT & EMISSION COMPLIANT ENGINES
- ENGINEERING & COMPRESSOR FLOW & SIZING SERVICES
- FULLY INTEGRATED COMPRESSOR & ENGINE SAFETY SHUTDOWN SYSTEMS
- 24-VOLT INTEGRATED LIGHTING PACKAGES FOR NIGHTTIME OPERATION
- SPARK ARRESTING MUFFLERS
- SEAL WELDED ENVIRONMENTAL SKIDS
- ASME CERTIFIED VESSELS & COOLERS
- UNIT BYPASSES PRE-PIPED ON ALL UNITS
- RELIEF VALVES PIPED FOR AIR & GAS SERVICE
- ELECTRIC & AIR STARTERS AVAILABLE
- FULL TIME ON CALL PARTS AND REPAIR SERVICE FOR OUR RENTAL UNITS 24 HOURS A DAY
- LARGE SELECTION OF BOOSTERS WITH VARIOUS FLOW & PRESSURE CAPABILITIES
- AIR INTAKE & OVER SPEED SAFETY SHUTOFF VALVES

WE ALSO OFFER:

- SHORT AND LONG TERM RENTALS & FLEXIBLE LEASE PLANS
- LEASE PURCHASES
- SALE OF USED AND RENTAL FLEET EQUIPMENT
- EQUIPMENT OPERATORS AND EQUIPMENT TRAINING SERVICES ARE AVAILABLE ON REQUEST
- TRANSPORTATION SERVICES TO THE CUSTOMER'S SITES WITH FLAT BED / WINCH TRUCKS
- RENTAL TRAILERS AVAILABLE IF A CUSTOMER WANTS TO USE HIS OWN TRUCK TO MOVE THE UNIT FROM SITE TO SITE

QUALITY RENTAL EQUIPMENT ACCESSORIES :

AUXILIARY FUEL TANKS - RIG-UP PIPING AND HOSES - DISCHARGE SILENCERS
MANIFOLDS - HIGH PRESSURE COALESCING FILTERS- AIR DRYERS
HIGH & LOW PRESSURE PORTABLE COMPRESSORS

BRAND	PRODUCT	RATING/SPECS
ATLAS COPCO	XAS SERIES XRVS SERIES	185 - 750 CFM / 125 PSIG 1000 - 2000 CFM / 365 PSIG
SULLAIR	900 XHA 1150XHA-900XH500 CLS 1350 / 350 / 500	900 CFM / 350 PSIG 1150 CFM / 350 / 500 PSIG 1350 CFM / 350 / 500 PSIG
INGERSOLL-RAND	IR 1170	1170 CFM / 350 PSIG



DESICCANT AIR DRYER

- 350 PSI
- 3000 CFM



HIGH PRESSURE COALESCING FILTER UNIT

- 2500 PSI
- 3000 CFM



SCRUBBER / COALESCING FILTER UNIT

- 350 PSI
- 1800 CFM



COMPRESSION LEASING SERVICES, INC.
www.compressionleasing.com
307.265.3242
 1925 & 1935 N. Loop • Casper, WY 82601
 DENVER, CO: 303.733.4882
 GILLETTE, WY: 307.682.2084



SAFETY
FIRST



BOE-TO
CODE



ENVIRONMENT
FRIENDLY

ISNetwork and PEC Compliant